
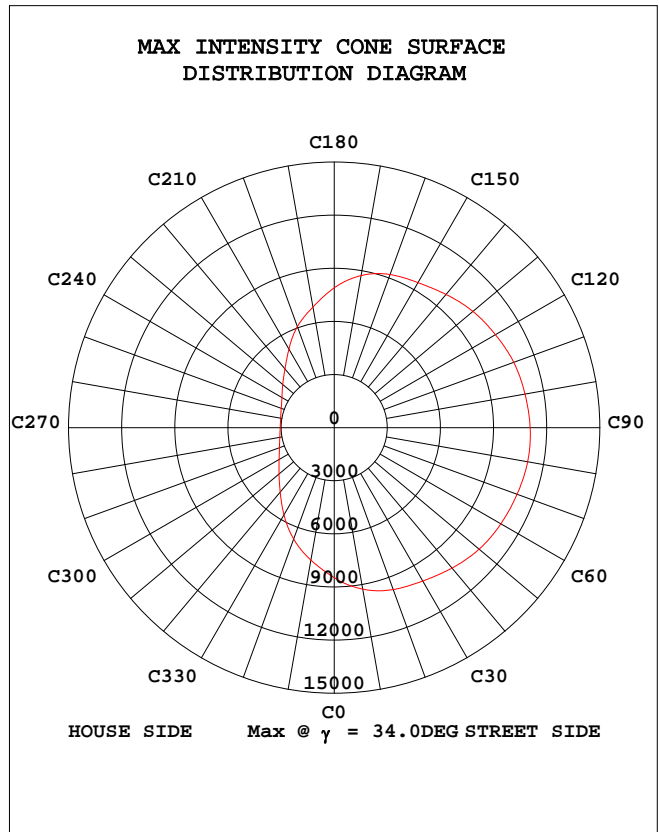


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:8.870V I:17.00A P:150.8W PF:1.000 Freq:0Hz Lamp Flux:24603x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Yangzhou Xintong Transport Equipment Group	CSUR.Ltd	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 163.16 lm/W			
MODEL	150W	I _{max} (cd)	11091	η street_up(%)	0.1
NOMINAL POWER(W)	150	LOR(%)	100.0	η street_down(%)	66.9
RATED VOLTAGE(V)	9	TOTAL FLUX(lm)	24603	η house_up(%)	0.1
NOMINAL FLUX(lm)	24603	MAXIMUM @(C,γ)	80,34.0	η house_down(%)	32.9
LAMPS INSIDE	1	η up(%)	0.2	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	9	η down(%)	99.8	SLI	20.626

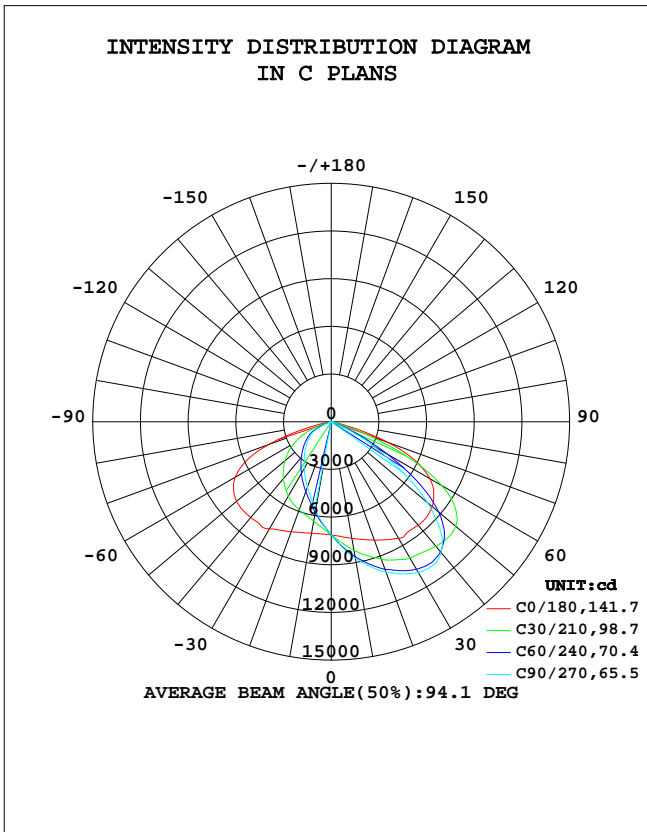


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-09-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:8.870V I:17.00A P:150.8W PF:1.000 Freq:0Hz Lamp Flux:24603x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Yangzhou Xintong Transport Equipment Group Co.,Ltd		Shielding Angle:N/A

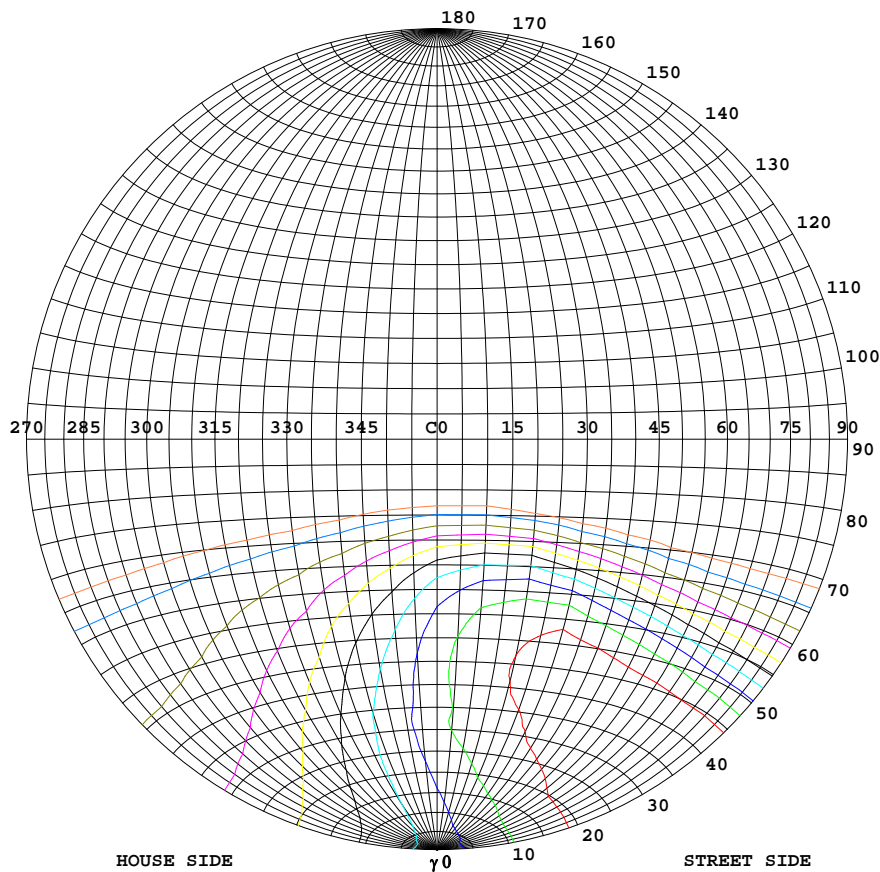

Classification:


IES:Type II - Very Short
 CIE:Narrow - Short
 IES:Cut-off
 CIE:Full cut-off
 Max.At80:12.62cd/klm
 Max.At90:3.119cd/klm
 Max.80-90:12.62cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	11091
90%	9982
80%	8873
70%	7764
60%	6655
50%	5546
40%	4436
30%	3327
20%	2218
10%	1109
5%	555

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-09-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

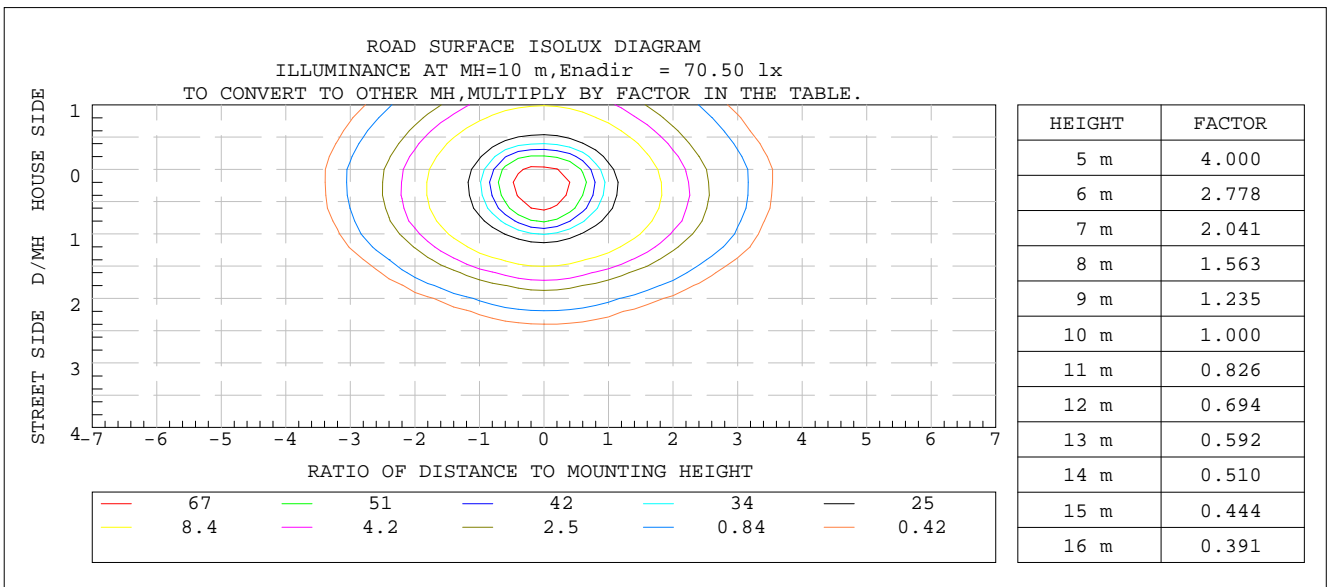

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: William
Test Date: 2019-09-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.362
Humidity: 65.7%
Test Distance: 26.000m [K=1.3952]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:8.870V I:17.00A P:150.8W PF:1.000 Freq:0Hz Lamp Flux:24603x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Yangzhou Xintong Transport Equipment Group	CSUR.Ltd	Shielding Angle:N/A


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum,lamp
10	744.9	846.6	871.3	819.0	712.4	605.9	566.0	627.5	0- 10	685.9	685.9	2.79,2.79
20	792.7	958.8	1007	916.4	736.4	520.8	438.3	557.0	10- 20	2076	2762	11.2,11.2
30	846.8	1030	1095	981.6	777.8	440.1	341.3	475.2	20- 30	3457	6218	25.3,25.3
40	850.8	1067	1073	1022	786.8	358.3	261.3	390.0	30- 40	4648	10867	44.2,44.2
50	829.8	967.4	788.6	948.7	778.2	277.5	194.8	303.1	40- 50	5309	16176	65.7,65.7
60	717.3	599.2	305.2	611.8	697.8	194.0	131.5	206.1	50- 60	4826	21002	85.4,85.4
70	374.0	96.24	41.17	116.7	419.8	68.52	33.95	63.48	60- 70	2856	23857	97,97
80	16.54	10.48	14.96	11.10	31.05	14.73	9.253	12.47	70- 80	609.2	24467	99.4,99.4
90	0.3403	0.6027	2.087	0.8669	1.332	0.7138	1.121	0.4360	80- 90	84.24	24551	99.8,99.8
100	0.2138	0.0553	0.0445	0.0521	0.3543	0.2375	0.1339	0.1832	90-100	2.510	24553	99.8,99.8
110	0.4715	0.0850	0.0445	0.0928	0.8277	0.8343	0.5507	0.6783	100-110	3.165	24557	99.8,99.8
120	0.6927	0.2064	0.1551	0.2299	1.180	1.458	1.246	1.217	110-120	6.287	24563	99.8,99.8
130	1.120	0.4535	0.3847	0.4682	1.187	1.546	1.735	1.399	120-130	8.318	24571	99.9,99.9
140	1.459	0.7365	0.6148	0.7286	1.239	1.660	2.224	1.477	130-140	8.874	24580	99.9,99.9
150	1.637	1.151	0.9563	1.107	1.394	2.000	2.269	1.748	140-150	8.765	24589	99.9,99.9
160	1.651	1.383	1.186	1.279	1.666	2.040	2.387	1.823	150-160	7.418	24596	100,100
170	1.894	1.810	1.563	1.561	1.762	2.129	2.267	1.923	160-170	4.906	24601	100,100
180	2.116	2.177	1.913	1.931	2.145	2.210	1.955	1.893	170-180	1.843	24603	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-09-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:8.870V I:17.00A P:150.8W PF:1.000 Freq:0Hz Lamp Flux:24603x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Yangzhou Xintong Transport Equipment Group Co.,Ltd	CSUR.Ltd	Shielding Angle:N/A

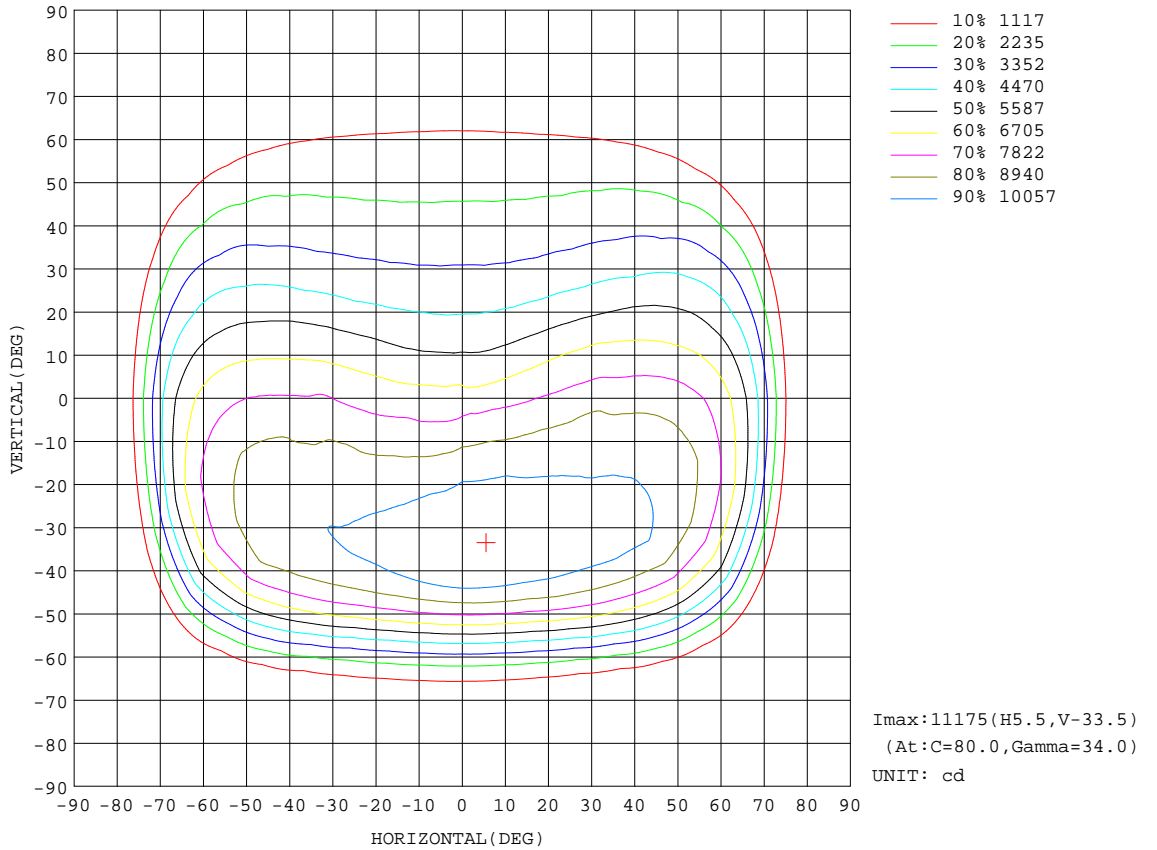

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2019-09-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.3952]
 Remarks:

Planar Illuminance Curve

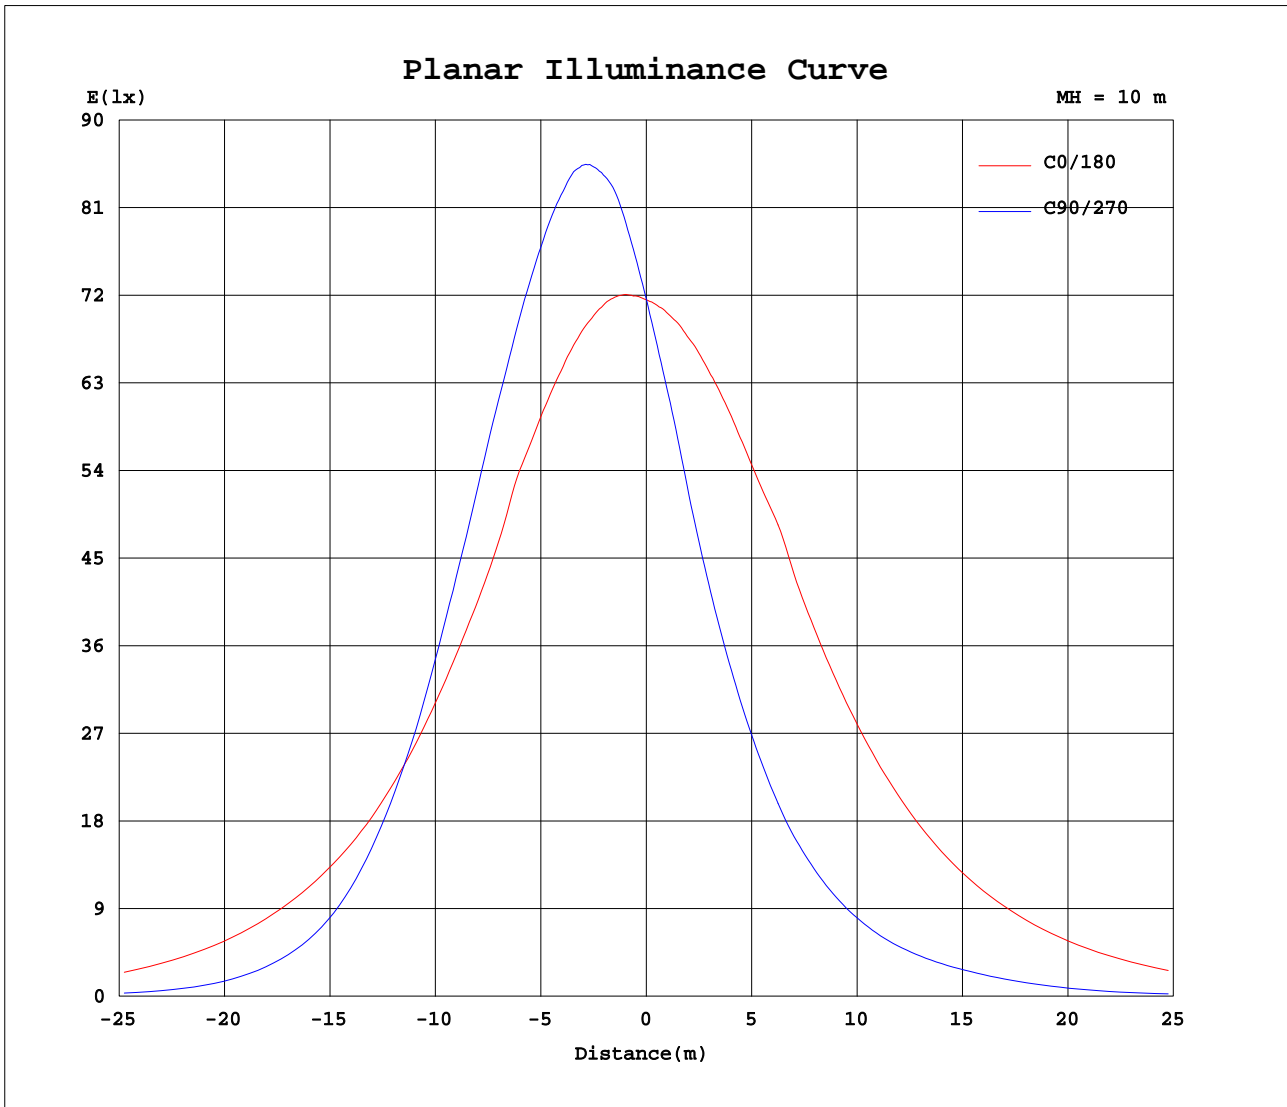


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: William
Test Date: 2019-09-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.362
Humidity: 65.7%
Test Distance: 26.000m [K=1.3952]
Remarks:

LCS REPORT

Test:U:8.870V I:17.00A P:150.8W PF:1.000 Freq:0Hz Lamp Flux:24603x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Yangzhou Xintong Transport Equipment Group Co.,Ltd	CSUR.Ltd	Shielding Angle:N/A

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

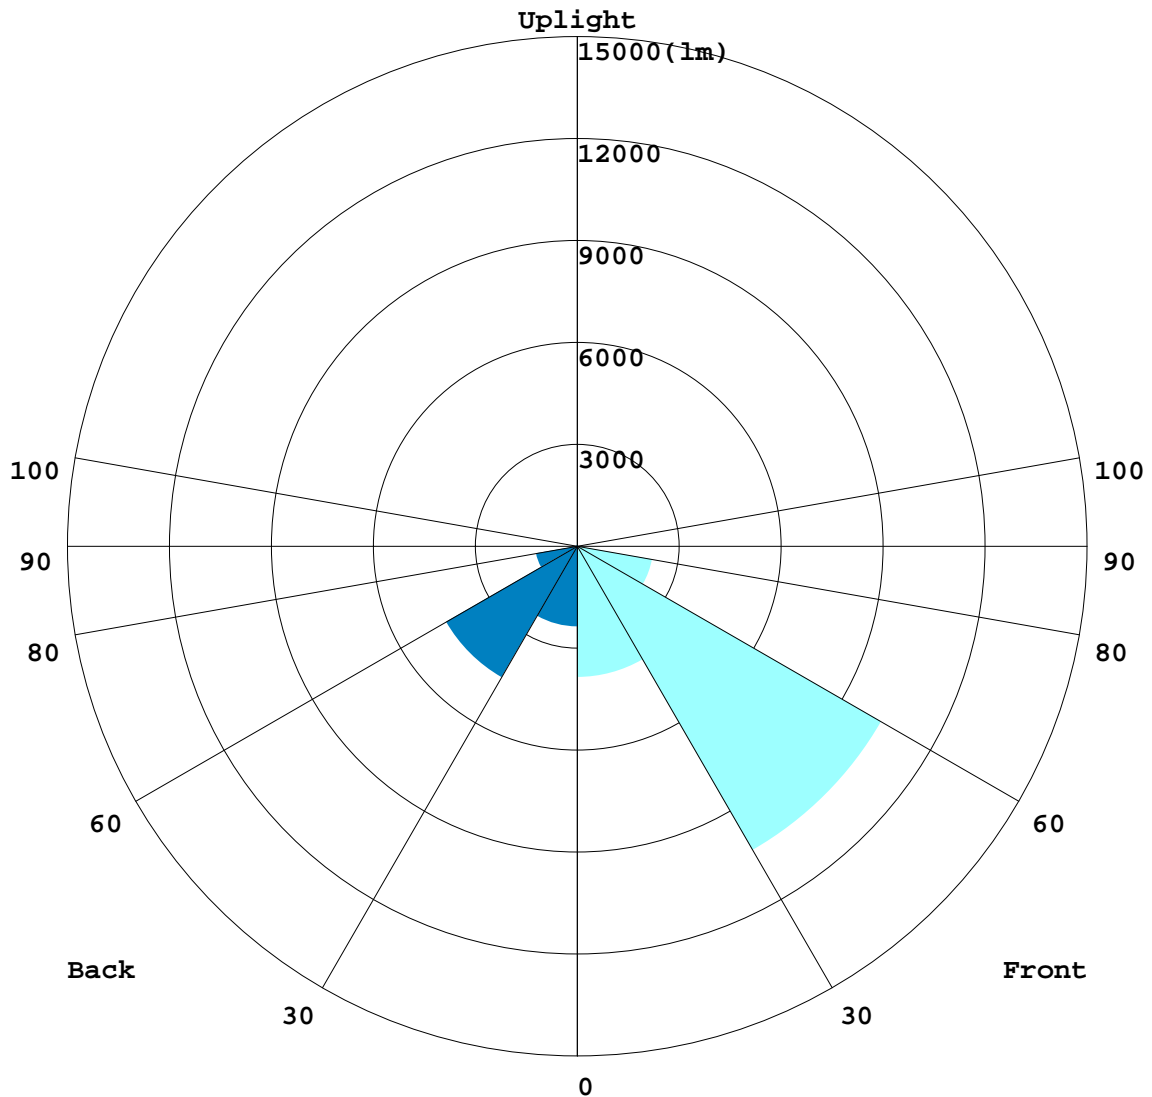

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-09-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

BUG REPORT

Test:U:8.870V I:17.00A P:150.8W PF:1.000 Freq:0Hz Lamp Flux:24603x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Yangzhou Xintong Transport Equipment Group	CSUR.Ltd	Shielding Angle:N/A

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	3852.9	15.7
FM - Front-Medium(30-60)	10328	42.0
FH - Front-High(60-80)	2236.9	9.1
FVH - Front-Very High(80-90)	46.967	0.2
Total Forward Light	16481	67.0

BL - Back-Low(0-30)	2365.5	9.6
BM - Back-Medium(30-60)	4455.3	18.1
BH - Back-High(60-80)	1228.2	5.0
BVH - Back-Very High(80-90)	37.276	0.2
Total Back Light	8121.5	33.0

UL - Uplight-Low(90-100)	2.5104	0.0
UH - Uplight-High(100-180)	49.577	0.2
Total Up Light	52.087	0.2

BUG(Back,Up,Glare) Rating	B3-U2-G3
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	8086.3	35.186	8121.5
Street Side	16465	16.901	16481


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-09-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

ROAD ISOCANDELA REPORT

Test:U:8.870V I:17.00A P:150.8W PF:1.000 Freq:0Hz Lamp Flux:24603x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Yangzhou Xintong Transport Equipment Group Co.,Ltd		Shielding Angle:N/A

ROAD SURFACE ISOCANDELA DIAGRAM

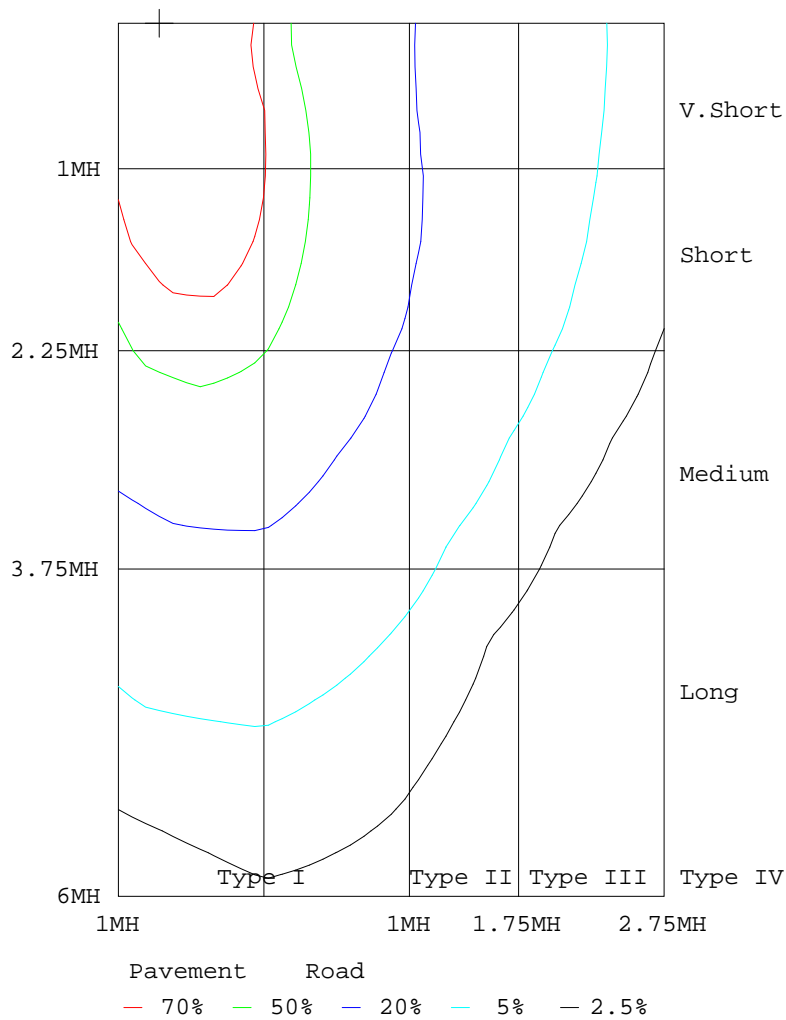

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-09-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:8.870V I:17.00A P:150.8W PF:1.000 Freq:0Hz Lamp Flux:24603x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Yangzhou Xintong Transport Equipment Group CSUR.Ltd		Shielding Angle:N/A

Table--1

UNIT: x10cd

C(DEG) γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	712	712	712	712	712	712	712	712	712	712	712	712	712	712	712	712	712	712	712
5	726	739	752	764	773	782	787	791	793	792	787	785	776	767	757	746	734	721	709
10	745	772	799	820	838	855	862	868	871	871	861	855	842	829	809	787	763	737	712
15	767	805	844	873	894	914	927	936	941	943	928	919	898	882	857	828	799	759	722
20	793	838	885	920	947	971	988	998	1004	1007	990	979	956	930	903	869	832	784	736
25	819	876	930	959	986	1012	1034	1052	1059	1056	1043	1027	997	968	939	907	872	816	754
30	847	921	968	989	1013	1047	1072	1087	1094	1095	1080	1064	1032	1001	963	934	906	860	778
35	846	926	975	1003	1040	1072	1088	1098	1108	1108	1094	1081	1054	1026	989	951	920	873	786
40	851	945	988	1023	1061	1073	1069	1070	1077	1073	1070	1057	1042	1031	1014	971	935	891	787
45	849	953	993	1035	1053	1032	1007	985	974	973	971	976	988	1002	1015	992	948	905	787
50	830	939	980	1022	995	940	883	824	796	789	793	821	868	923	974	993	947	905	778
55	788	899	936	955	870	778	673	592	549	539	550	594	669	773	870	952	922	887	750
60	717	820	844	803	668	531	407	340	311	305	314	346	411	538	685	823	858	833	698
65	586	665	670	546	393	257	180	141	129	127	133	150	189	272	421	587	715	710	596
70	374	407	369	229	129	63.9	45.2	39.0	39.8	41.2	41.5	44.4	54.5	78.3	155	274	440	479	420
75	113	112	71.5	27.8	16.8	16.3	17.8	19.0	20.7	21.2	20.7	19.1	18.4	19.0	23.8	48.0	119	172	167
80	16.5	12.0	11.2	8.70	8.94	12.0	14.1	17.8	16.2	15.0	15.9	16.6	13.4	12.4	9.84	12.0	20.3	24.9	31.0
85	6.70	3.95	4.04	3.88	3.48	6.45	14.2	19.6	15.1	11.7	14.5	18.0	13.3	6.89	4.22	4.95	8.26	5.62	11.5
90	0.34	0.42	0.44	0.50	0.43	0.78	3.03	7.08	4.73	2.09	5.03	7.67	3.92	1.14	0.59	0.81	0.87	1.04	1.33
95	0.18	0.16	0.13	0.10	0.07	0.07	0.07	0.07	0.06	0.06	0.06	0.07	0.07	0.05	0.07	0.08	0.13	0.16	0.22
100	0.21	0.16	0.12	0.08	0.06	0.05	0.05	0.05	0.05	0.04	0.05	0.05	0.05	0.05	0.05	0.07	0.10	0.15	0.35
105	0.36	0.26	0.15	0.09	0.06	0.05	0.05	0.05	0.05	0.04	0.05	0.05	0.05	0.05	0.05	0.07	0.13	0.22	0.61
110	0.47	0.37	0.24	0.15	0.11	0.06	0.05	0.05	0.05	0.04	0.05	0.05	0.05	0.07	0.11	0.17	0.25	0.36	0.83
115	0.54	0.44	0.31	0.23	0.15	0.11	0.10	0.05	0.08	0.08	0.09	0.10	0.11	0.12	0.18	0.25	0.37	0.51	1.08
120	0.69	0.54	0.40	0.29	0.23	0.18	0.16	0.12	0.15	0.16	0.14	0.13	0.15	0.21	0.25	0.35	0.48	0.63	1.18
125	0.95	0.76	0.59	0.48	0.35	0.32	0.28	0.25	0.28	0.30	0.27	0.27	0.25	0.34	0.39	0.54	0.70	0.89	1.18
130	1.12	0.94	0.77	0.61	0.47	0.44	0.38	0.34	0.37	0.38	0.37	0.39	0.40	0.45	0.48	0.60	0.82	1.06	1.19
135	1.19	1.03	0.86	0.75	0.60	0.54	0.52	0.47	0.47	0.50	0.48	0.50	0.50	0.51	0.60	0.75	0.91	1.11	1.19
140	1.46	1.31	1.16	0.97	0.78	0.69	0.74	0.64	0.59	0.61	0.60	0.61	0.69	0.71	0.74	0.97	1.18	1.37	1.24
145	1.59	1.45	1.31	1.16	0.99	0.89	0.91	0.82	0.80	0.79	0.72	0.77	0.88	0.92	0.90	1.08	1.30	1.49	1.30
150	1.64	1.53	1.43	1.34	1.20	1.10	1.05	1.00	0.95	0.96	0.93	0.94	1.04	1.11	1.11	1.18	1.31	1.53	1.39
155	1.64	1.57	1.52	1.43	1.35	1.26	1.16	1.08	1.06	1.07	1.06	1.05	1.14	1.17	1.28	1.30	1.37	1.54	1.51
160	1.65	1.59	1.53	1.44	1.41	1.36	1.28	1.19	1.18	1.19	1.17	1.16	1.22	1.25	1.31	1.30	1.42	1.53	1.67
165	1.72	1.67	1.64	1.59	1.53	1.54	1.51	1.40	1.41	1.41	1.38	1.33	1.33	1.34	1.41	1.42	1.47	1.56	1.67
170	1.89	1.87	1.86	1.86	1.80	1.82	1.81	1.64	1.60	1.56	1.53	1.50	1.53	1.53	1.59	1.58	1.64	1.72	1.76
175	2.09	2.06	2.12	2.12	2.07	2.08	2.05	1.88	1.84	1.79	1.77	1.74	1.74	1.74	1.79	1.81	1.83	1.83	2.01
180	2.12	2.11	2.19	2.23	2.18	2.17	2.17	1.92	1.97	1.91	1.84	1.91	1.88	1.89	1.97	1.90	1.90	1.85	2.15

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-09-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:8.870V I:17.00A P:150.8W PF:1.000 Freq:0Hz Lamp Flux:24603x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Yangzhou Xintong Transport Equipment Group CSUR.Ltd		Shielding Angle:N/A

Table--2

UNIT: x10cd

C(DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	712	712	712	712	712	712	712	712	712	712	712	712	712	712	712	712	712		
5	695	683	670	660	652	644	639	638	638	640	646	652	662	671	685	698	712		
10	683	661	636	614	597	581	571	565	566	569	581	596	617	638	663	689	717		
15	680	644	610	577	546	520	503	494	496	501	518	542	574	611	649	688	728		
20	683	638	590	542	500	468	449	438	438	445	463	490	531	583	636	688	740		
25	687	632	569	506	457	421	399	389	387	395	412	442	488	549	620	689	753		
30	692	622	540	466	414	376	353	342	341	346	365	395	441	509	593	680	761		
35	690	606	506	426	372	333	311	300	297	304	321	351	398	467	562	665	756		
40	676	575	468	385	331	294	272	262	261	265	281	310	357	423	519	636	742		
45	658	541	426	345	290	256	237	227	227	231	246	271	315	379	472	600	720		
50	629	496	379	302	253	221	203	195	195	199	211	234	274	332	420	550	685		
55	587	442	330	259	215	188	173	167	167	170	181	199	231	282	359	486	633		
60	522	373	271	212	176	153	139	132	131	133	142	159	186	226	288	403	550		
65	419	282	200	154	123	100	85.9	78.0	76.3	77.3	85.0	99.4	122	155	205	293	429		
70	273	170	111	78.7	58.3	45.7	39.0	35.5	33.9	35.0	38.0	44.0	54.7	72.3	101	157	255		
75	102	56.7	35.6	27.5	24.2	22.2	20.3	16.7	14.9	16.9	19.6	20.7	21.4	22.5	27.7	42.9	77.9		
80	25.8	17.1	14.6	14.5	14.9	14.7	12.7	8.81	9.25	8.98	12.8	13.8	13.2	11.7	11.8	13.7	19.4		
85	13.7	7.92	3.66	4.52	6.79	6.84	5.92	5.00	5.25	4.80	5.92	5.66	5.58	3.20	2.86	4.87	10.9		
90	1.49	0.51	0.63	0.61	0.81	0.90	1.25	1.38	1.12	1.26	0.99	0.65	0.55	0.33	0.34	0.26	0.81		
95	0.23	0.20	0.15	0.10	0.08	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.06	0.09	0.12	0.19	0.25		
100	0.42	0.40	0.34	0.26	0.22	0.17	0.16	0.13	0.13	0.13	0.12	0.13	0.16	0.21	0.30	0.40	0.45		
105	0.68	0.69	0.65	0.55	0.47	0.41	0.35	0.31	0.28	0.28	0.29	0.30	0.35	0.45	0.59	0.71	0.74		
110	0.97	1.00	0.95	0.87	0.80	0.74	0.66	0.60	0.55	0.54	0.56	0.56	0.62	0.74	0.89	1.00	1.01		
115	1.20	1.25	1.30	1.22	1.16	1.04	0.96	0.91	0.85	0.81	0.86	0.85	0.90	1.02	1.15	1.24	1.24		
120	1.40	1.53	1.55	1.51	1.40	1.39	1.29	1.29	1.25	1.18	1.17	1.15	1.16	1.27	1.36	1.36	1.34		
125	1.41	1.53	1.64	1.50	1.49	1.55	1.45	1.50	1.54	1.43	1.17	1.33	1.27	1.34	1.37	1.36	1.30		
130	1.40	1.47	1.52	1.52	1.57	1.75	1.56	1.57	1.73	1.59	1.53	1.50	1.42	1.38	1.37	1.34	1.30		
135	1.28	1.39	1.54	1.62	1.56	1.75	1.96	2.08	2.22	2.00	2.00	1.53	1.46	1.45	1.43	1.36	1.28		
140	1.32	1.50	1.65	1.66	1.66	1.90	2.01	2.10	2.22	2.03	2.09	1.54	1.49	1.46	1.43	1.41	1.36		
145	1.41	1.53	1.70	1.75	1.94	2.15	2.07	2.09	2.27	2.11	2.13	1.69	1.65	1.50	1.47	1.44	1.39		
150	1.51	1.63	1.78	1.93	2.07	2.26	2.21	2.02	2.27	2.11	2.17	1.91	1.81	1.69	1.58	1.51	1.44		
155	1.60	1.79	2.00	2.08	2.06	2.26	2.27	2.23	2.39	2.22	2.17	2.05	1.82	1.82	1.76	1.67	1.57		
160	1.70	1.81	1.95	2.04	2.04	2.25	2.25	2.30	2.39	2.23	2.19	2.13	1.83	1.82	1.77	1.70	1.63		
165	1.70	1.81	1.92	2.01	2.02	2.19	2.22	2.30	2.36	2.31	2.18	2.13	1.93	1.82	1.79	1.71	1.65		
170	1.77	1.89	2.01	2.12	2.14	2.20	2.18	2.19	2.27	2.22	2.16	2.12	1.95	1.90	1.92	1.82	1.74		
175	2.00	2.06	2.14	2.22	2.20	2.20	2.17	2.06	2.10	2.05	2.02	2.00	1.93	1.90	1.95	1.90	1.86		
180	2.11	2.11	2.17	2.23	2.19	2.16	2.17	1.91	1.96	1.91	1.84	1.88	1.90	1.88	1.93	1.91	1.90		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-09-10

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks: